

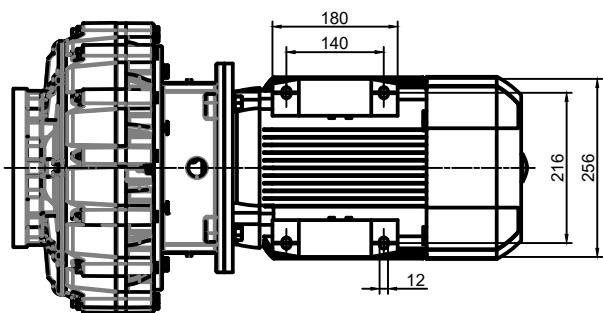
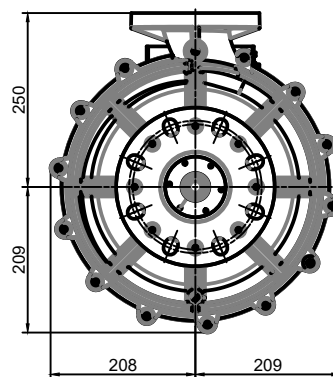


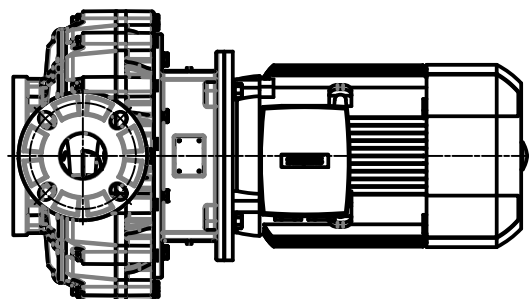



Motor length may vary
provide reserve space for expansion

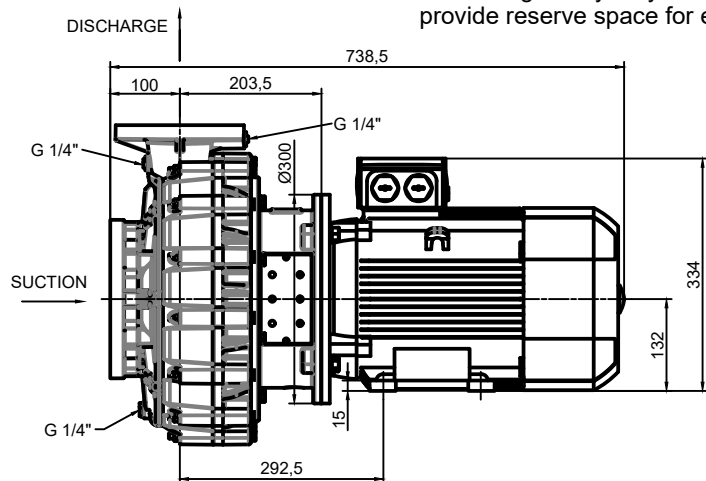

FLANGE CONNECTIONS COMPATIBLE WITH ANSI CLASS 150 FLANGES


DISCHARGE

Suction

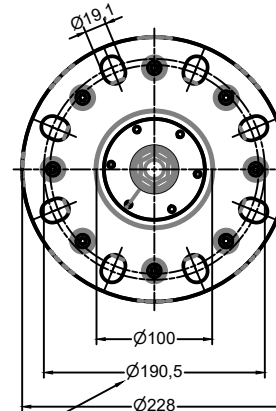

Diameter of Bolt Circle
for 3" ANSI Flange

Diameter of Bolt Circle
for 4" ANSI Flange

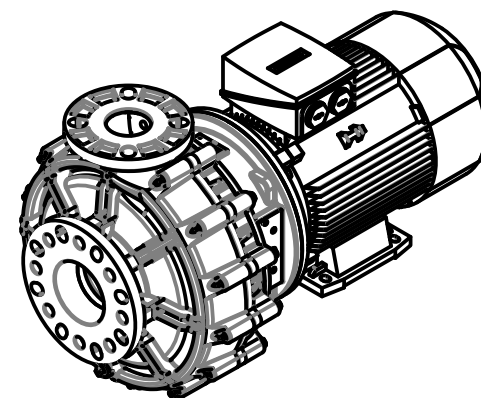

THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF SPECK PUMPS - POOL PRODUCTS, INC. NO PORTION OF THIS DATA SHALL BE RELEASED, DISC LOADED, USED, OR DUPLICATED FOR USE IN PROCUREMENT OR MANUFACTURING WITHOUT SPECIFIC WRITTEN CONSENT FROM SPECK PUMPS - POOL PRODUCTS, INC.

Reference dimension Tolerances to: DIN ISO 2768-mS Surface √ √ √ √				Scale: Volume:- Weight:-	
1 Revised for SPECK USA 10-14-2016 Drawn 05.10.2016 Name Kraus				Werkstoff: Modell / Art.Nr.:	
Checked Approved SPECK X pumps 8125 Bayberry Road Jacksonville, FL 32259				DIMENSIONAL DRAWING Normblock Multi 65/250 (132S frame motor) with ANSI 3" Suction Flange Connection ANSI 4" Discharge Flange Connection	
Rev Description Date Name File Name: VD61-11.010.idw				Drawing Number: VD61.11.010.USA 1 / 1 A2	

Motor

Frame Size: 132 S
Rating: 5,5 kW
7.5HP SF1.15